




## Dismantling joints with 3 flanges, PN 16

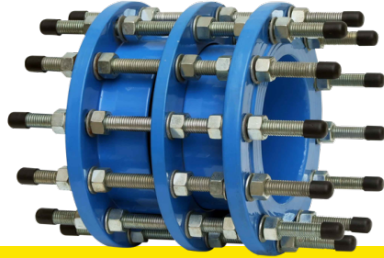

Art. 20041

Flanges: UNI EN 1092-2 PN 16

Installation: horizontal / vertical


APPLICATIONS • Water supply • Industry • Irrigation •  
Pumping stations • Water treatment plants •  
Hydropower plants • Reservoirs • Sewage  
Epoxy painting suitable for drinking water applications.

The dismantling joints with 3 flanges are used in order to mount and dismantle valves from the pipeline. The extensible construction of dismantling joints allows to change the length of the joint itself, for easier installation or dismantling procedures. The body of the joint is made in ductile iron or cast steel with epoxy resin coating, with rubber gasket NBR and galvanized steel studs and bolts.

### Materials

body	ductile iron GGG40, EN-GJS-400 (or cast steel)
gasket	rubber
stud	electro galvanized steel
painting	epoxy

## Dimensions

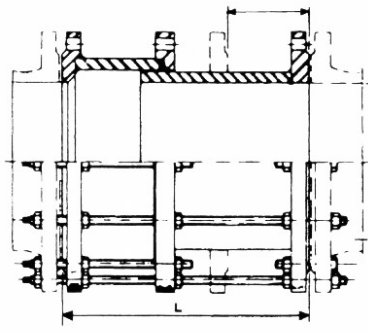

DN	L MAX mm.	L MIN mm.	C mm.	Weight kg.
80	200	170	30	19
100	200	170	30	22
125	200	170	30	24
150	200	170	30	30
200	220	190	30	42
250	230	200	30	52
300	250	220	30	72
350	260	230	30	79
400	270	240	30	118
450	270	240	30	163
500	280	250	30	180
600	300	270	30	220
700	300	270	30	287
800	320	290	30	346
900	320	290	30	431
1000	340	310	30	487
1200	360	330	30	801

