



## Cast iron regulating globe valves PN 16



Art. 517

Flanges: UNI EN 1092-2 PN 16


Design: EN 1074

Face to face length: EN 558-1 serie 1

Installation: horizontal / vertical, with the flow following the direction of the arrow. When working pressure exceeds below indicated limits, valves must be installed in opposite direction, with pressure over the shutter, and balance disc type compulsory.

APPLICATIONS • Oil & refineries • Water • Steam • Industry

Cast iron regulating globe valves are suitable for the main purpose of flow regulation, in addition to the traditional on-off purpose. The specific design including parabolic disc and a fine pitch stem favours a very sensitive regulation. For diameters higher than DN 150, the globe valve is equipped with balanced disc, to facilitate the opening; in this case the valve has to be mounted in the opposite direction, with pressure over the shutter. Handwheel operated. Graphite rings are easily replaceable for maintenance. These globe valves can be applied for water, steam, not aggressive fluids, temperature and working pressure according to DIN 2401 part 2.

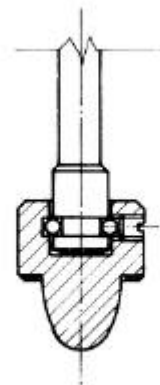


"P" Parabolic

## Materials

body	cast iron GG25, EN-GJL-250
bonnet	cast iron GG25, EN-GJL-250
handwheel	cast iron GG25, EN-GJL-250
stem	stainless steel X 20 CR 13
body and disc facing	stainless steel 304
disc	steel A182-F6
stem packing	graphite
bonnet gasket	graphite
painting	nitro enamel

## Dimensions

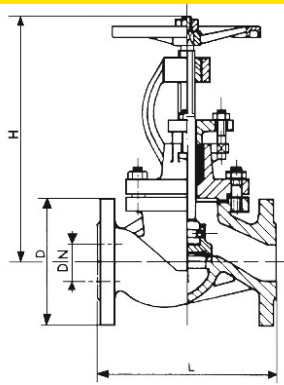

DN	L mm.	H mm.	D mm.	Weight kg.
15	130	188	95	4
20	150	188	105	4
25	160	196	115	5
32	180	207	140	8
40	200	254	150	10
50	230	266	165	13
65	290	300	185	17.5
80	310	336	200	30
100	350	377	220	41
125	400	430	250	61
150	480	474	285	87
200	600	607	340	157
250	730	670	405	204.5
300	850	750	460	220

**Pressure**

DN      Nominal pressure Test pressure Mpa      Max working pressure Mpa

mm      BAR      body      seat      120°C      200°C

15 - 300      16      2,4      1,76      1,6      1,3

**DN mm.**

250

300

**Atm.**

9

6

